

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
3 March 2005 (03.03.2005)

PCT

(10) International Publication Number
WO 2005/018724 A1

(51) International Patent Classification⁷: **A61M 16/16**

(21) International Application Number:
PCT/NZ2004/000182

(22) International Filing Date: 12 August 2004 (12.08.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
527734 20 August 2003 (20.08.2003) NZ

(71) Applicant (for all designated States except US): **FISHER & PAYKEL HEALTHCARE LIMITED [NZ/NZ]**; 15 Maurice Paykel Place, East Tamaki, Auckland, 1706 (NZ).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **KRAMER, Martin, Paul, Friedrich [NZ/NZ]**; 16a Wilkinson Road, Ellerslie, Auckland, 1005 (NZ).


(74) Agents: **ADAMS, Matthew, D et al.**; A J Park, 6th Floor Huddart Parker Building, PO Box 949, Wellington, 6015 (NZ).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: **WATER CHAMBER FOR HUMIDIFIER**

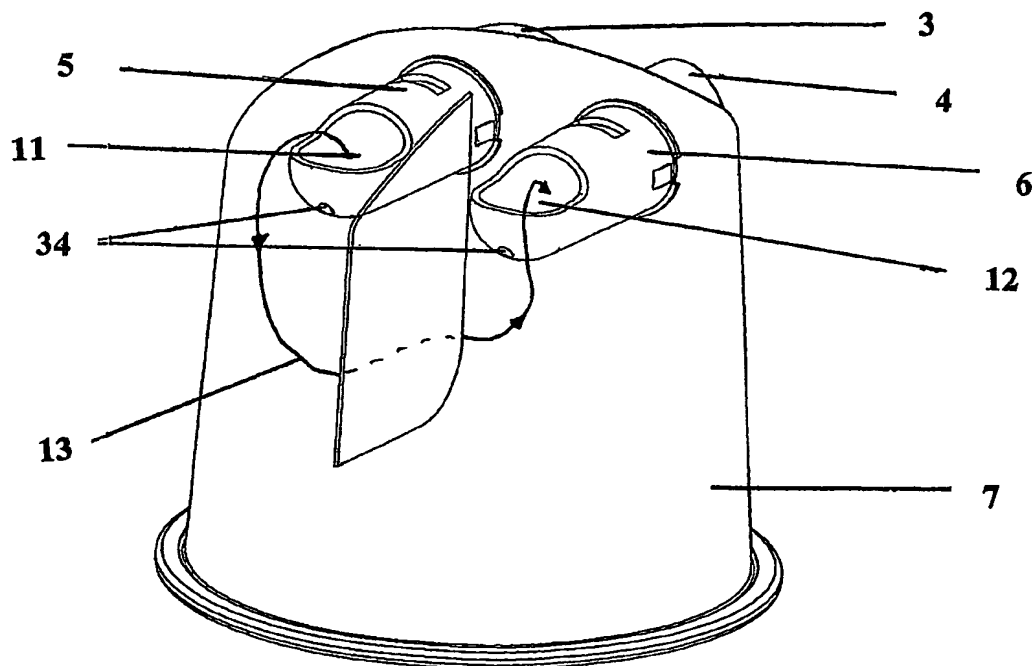

(57) Abstract: A water chamber (1) adapted for use in conjunction with a heater base, for humidifying an air stream. The chamber (1) including at least one horizontally oriented gases port (3) including an elongate flow tube (5) extending into the chamber (1) from the inner periphery of the gases port (3), the flow tube (5) having an opening at its distal end facing a direction transverse to the axis of the tube (5).



Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.